


Specifications

- Mitutoyo Digimatic Dial Indicator Base
- Integrated Bluetooth Low Energy Data Transmitter
- Built-in Rotating Angle Measurement with 1° resolution
- Direct Connection to iPhone/iPad/Android/PC (via dongle)
- SPC Data Output Available
- Maximum Dimension: 120 (L) x 57 (W) x 40 (H) mm
- Measuring Range: 0.5 in/12.5 mm
- Resolution: 0.0001 in/0.001 mm, 0.0005 in/0.01 mm
- Accuracy: 0.00012 in, 0.0008 in
- Wireless Data Transmission Range: 10 m (line of sight)
- Wireless Data Transmission Rate: 10 Hz
- Working Temperature: 0-50 °C
- Battery: 400 mAh rechargeable
- Battery Usage Life: 30 hr
- Charging: 5 VDC USB and 110 VAC

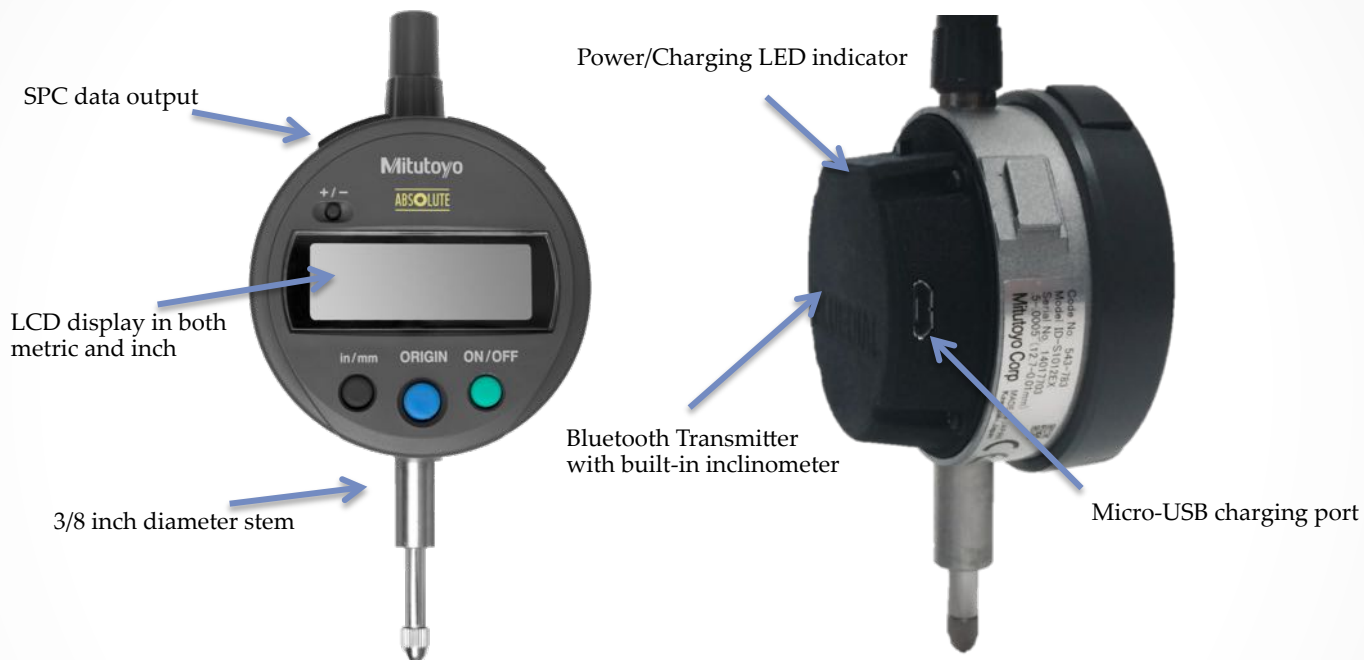

More Features with our FREE Apps

- Multiple devices simultaneous reading
- Real-time plot on iPhone/iPad
- Continuous or Single data recording
- Measurement Max, Min, Average
- TIR value and analog indicator
- Dial Origin in App
- Various analog dial indicator faces
- Limit handle and peak hold mode
- Measurements voice read in 9 languages
- Measurements database management
- Email export and Dropbox synchronization
- Test report generation

