

# H900 Series – Diagnostic Couplings/Micro Hoses

## FEATURES

- Leak-proof connection
- Connect/disconnect under pressure up to 5800 PSI
- Self-locking metal cap
- Able to test systems at working pressure

## APPLICATIONS

- Monitoring and control of pressure
- Venting
- Fluid sampling
- Remote testing

## INTERCHANGEABILITY

- Stauff
- Parker

## MATERIALS


- Steel
- Stainless steel

## TEMP. RATING

- -4°F to 212°F

## RATED PRESSURE

- 9000 PSI

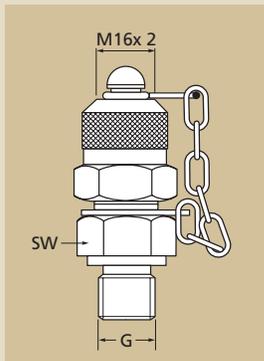

## TEST CONNECTORS

PART NO.	THREAD (G)	HEX (SW)	MATERIAL
H900-01	M8 x 1	.67	STEEL
H900-10	5/16" - 24 ORB	.67	STEEL
H900-11	7/16" - 20 ORB	.67	STEEL
H900-11-SS	7/16" - 20 ORB	.67	STAINLESS
H900-12	9/16" - 18 ORB	.75	STEEL
H900-12-SS	9/16" - 18 ORB	.75	STAINLESS
H900-20	1/8" NPTM	.67	STEEL
H900-21	1/4" NPTM	.75	STEEL
H900-21-SS	1/4" NPTM	.75	STAINLESS
H900-22	3/8" NPTM	.75	STEEL
H900-23	1/2" NPTM	.95	STEEL
H900-24	1/4" NPTF	.95	STEEL
H900-25	M10 x 1	.75	STEEL
H900-26	M12 x 1.5	.75	STEEL
H900-27	M14 x 1.5	.95	STEEL
H900-28	M16 x 1.5	.87	STEEL
H900-30	1/8" BSPM	.67	STEEL
H900-31	1/4" BSPM	.75	STEEL
H900-31-SS	1/4" BSPM	.75	STAINLESS
H900-32	3/8" BSPM	.87	STEEL
H900-33	1/2" BSPM	1.07	STEEL
H900-45	7/16" - 20 ORBM	.75	STEEL
H900-49	7/16" - 20 ORBF	.75	STEEL
H900-89	M16 x 2 Hose Union	.67	STEEL